

HOOD FOR AIR INLET OPTIONS WITH 30% OPENING

INSTALLATION FORM RZ-NA 400H
OBSOLETE FORM 403/409/413-H



APPLIES TO: Models RGB, RPB, RGLB and RPBL and
Blower Cabinets RBA, RBL with Air
Inlet Options AR6 and AR7

Description/Application


The outside air hood included in the air inlet options that have a 30% outside air opening (Options AR6 and AR7) is shipped separately for field installation. The hood is factory assembled but must be attached to the blower cabinet.

Screened Air Hood for 30% Outside Air Opening			
RGB/RPB	RGLB/RPBL	P/N	Width of Hood
75, 100, 125		105117	28-5/8" (727mm)
150 175		105118	34-1/8" (867mm)
200, 225		105119	39-5/8" (1006mm)
250, 300	500, 600	105120	47-7/8" (1216mm)
350	700,1050	105121	53-3/8" (1356mm)
400	400, 800, 1200	105122	58-7/8" (1495mm)
RBA Blower Cabinet		105118	34-1/8" (867mm)
RBL Blower Cabinet		105122	58-7/8" (1495mm)

Installation Instructions

On the air inlet side of the blower cabinet, remove the row of factory-installed screws attaching the blower cabinet top. Slide the air hood underneath the lip of the blower cabinet top and the sides into the vertical slots. The air hood flange must be between the blower cabinet top and the cabinet end panel. Reinsert all of the sheetmetal screws.

**Figure 1 - Installation of
Screened Air Hood on
Cabinets with 30%
Outside Air Opening**

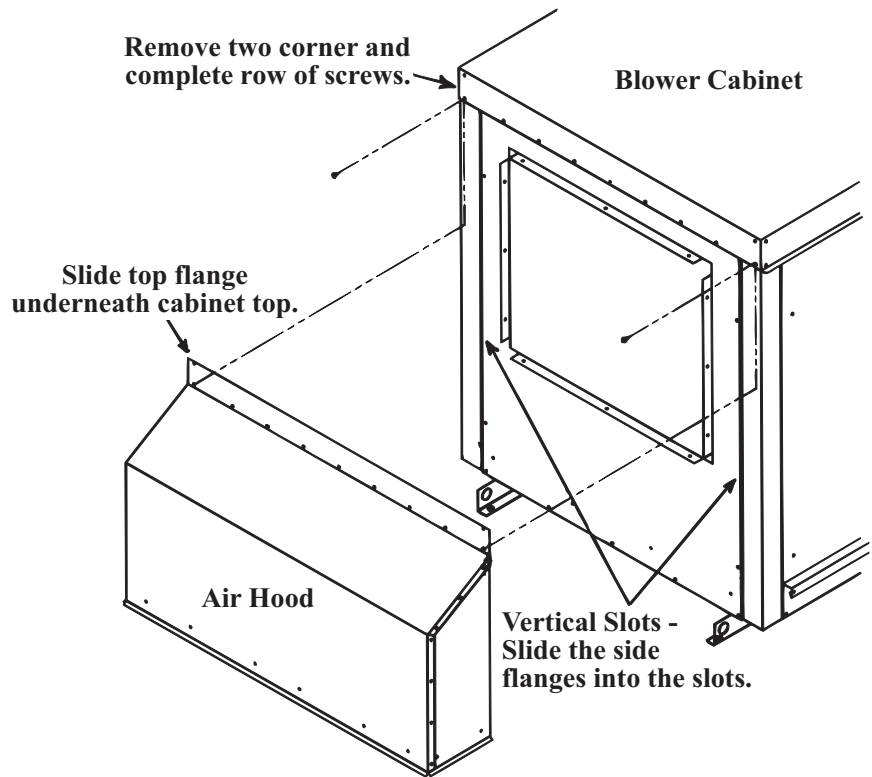

©2001 Thomas & Betts Corporation, All rights reserved.

Printed in the U.S.A.

MANUFACTURER OF GAS, OIL, ELECTRIC HEATING AND VENTILATING SYSTEMS

Trademark Note: Reznor® is registered in the United States and other countries.

(800) 695-1901; www.ReznorOnline.com

12/01 POD Form 400H.2

Mfg No. 131794, Page 1