



NEW REZNOR® SEALED COMBUSTION LOW-PROFILE UNIT HEATER

The new Reznor Model SFT was designed specifically for areas with limited space, negative pressure and/or dirty or mildly corrosive indoor environments.

Since this unit draws combustion air from outside the heated space, the reliability is greatly increased. So reliable, in fact, that there is an 10 year warranty on the heat exchanger.*

These units deliver high performance in a compact design requiring only 1" to 6" of top mounting clearance for installation.





All sizes are designed to provide 80% thermal efficiency to elevations of 2,000 feet and may be ordered with either natural or propane gas. Options are available to adapt units to higher altitudes.

The Model SFT line of heaters is design-certified by A.G.A. and C.G.A. to gas unit heater standards and IAS requirements for unit heaters for residential use.

- Residential Approval on Sizes 45,000 to 75,000 BTUH
- Tubular Aluminized Steel Heat Exchanger
- Lightweight, Removable Aluminized Steel Burner Rack
- Inshot Burners
- Direct Spark Ignition with 100% Lockout
- Integrated Circuit Board with LED Diagnostic Indicator Light
- High Temperature Limit Control
- Factory Installed Power Venter - Vertical or Horizontal Vent Capabilities
- Single Building Penetration for Exhaust and Combustion Air
- Hinged Access Door

*Heat exchanger warranted against defects in materials and workmanship. See warranty sheet for complete details.

NOTE: Composite drawings are not proportional for all sizes.

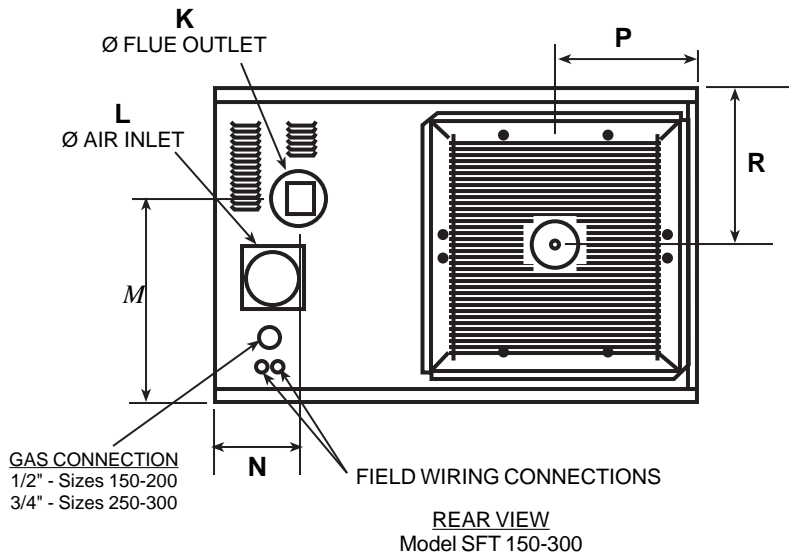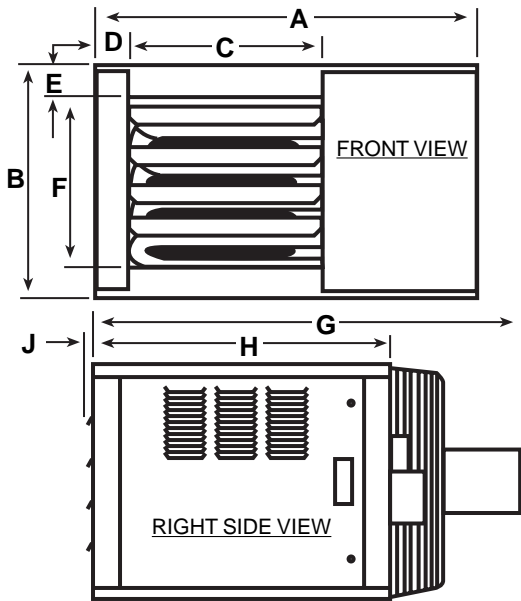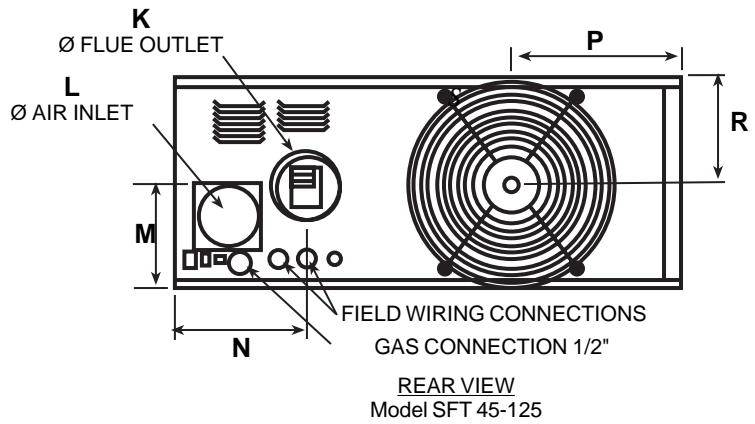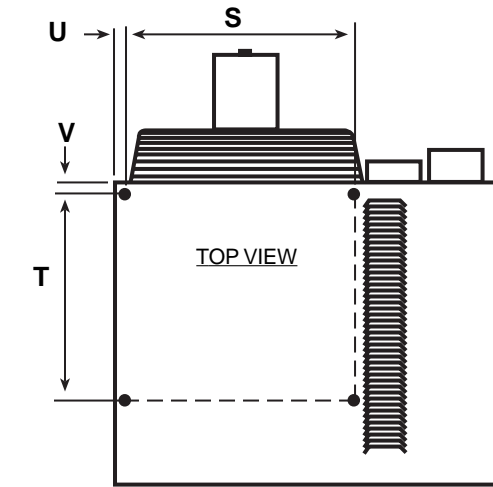

Dimensions (+ or - 1/8 inch)

Size	A	B	C	D	E	F	G	H	J	K	L	M	N
45	29 5/8	12 1/8	15	2 5/8	1	10 1/8	26 1/4	21 1/4	3/8	4	3	5 3/4	7 5/8
60-75	29 5/8	18 1/8	15	2 5/8	2 1/2	13 1/8	31 3/8	23 1/4	3/8	5	4	10 1/2	8
100	38	22	20 5/8	2 1/4	5	12	33 1/2	25 3/8	1	5	4	11	9 1/2
125	38	22	20 5/8	2 1/4	3 5/8	14 3/4	33 1/2	25 3/8	1	5	4	11	9 1/2
150	38	33	20 5/8	2	6	21	34	25 3/8	1	5	5	21 3/4	9 1/4
200	38	33	20 5/8	2	4 1/2	24	34	25 3/8	1	5	5	21 3/4	9 1/4
250	51 1/4	33	34 1/2	2	4 1/2	24	35 3/8	25 3/8	1	5	5	21 1/2	9 1/4
300	51 1/4	33	34 1/2	2	4 1/2	24	35 3/8	25 3/8	1	6	6	22	9 1/4

Size	P	R	S	T	U	V
45	10	6	18	16	1/2	3/4
60-75	10	9	18	16	1/2	3/4
100	13 1/4	11	24 1/4	16	1/2	4 5/8
125	13 1/4	11	24 1/4	16	1/2	4 5/8
150	13	16 1/2	24 1/4	16	1/2	4 5/8
200	13	16 1/2	24 1/4	16	1/2	4 5/8
250	15 1/8	16 1/2	29 3/8	16	8 1/2	4 5/8
300	15 1/8	16 1/2	29 3/8	16	8 1/2	4 5/8

Required Clearances (Inches)			
Sizes	45-75	100-200	250-300
Top	1	6	6
Flue Connector	6	6	6
Access Panel	20	24	24
Non-Access Side	1	6	6
Bottom	1	1	1
Rear	18	18	24

WARNING: Gas-fired appliances are not designed for use in hazardous atmospheres containing flammable vapors or combustible dust, or atmospheres containing chlorinated or halogenated hydrocarbons. Installations in public garages or airplane hangars are permitted when in accordance with ANSI Z223.1 and NFPA 54 Codes or CAN1-B149 Codes and enforcing authorities.